




# DIRIS B

## Multifunction power monitoring devices

Measurement & wireless metering



Configuration with EasyConfig, see page 530.

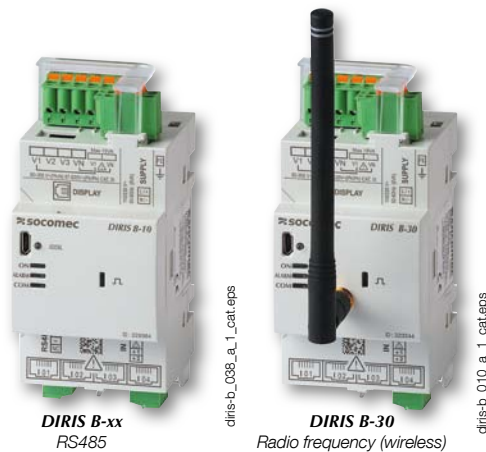

DIRIS B-xx  
RS485

diris-b\_008\_a\_1\_cat.eps

DIRIS B-30  
Radio frequency (wireless)

diris-b\_010\_a\_1\_cat.eps

### The solution for

- > Industry
- > Building
- > Infrastructure
- > Local authority



### Strong points

- > Plug & Play
- > Global accuracy class 0.5 in accordance with IEC 61557-12
- > Multi-circuit
- > Communication

### Integrated technologies



For more information, see page

### Conformity to standards

- > UL E257746
- > IEC 61557-12
- > EN 50160
- > ISO 14025



### Function

The DIRIS B-30 is a power monitoring device in a modular format that communicates wirelessly or via RS485. The 4 RJ12 independent current inputs of the device allow it to manage several types and number of circuits: for example, 4 single-phase loads or 1 three-phase load + 1 single-phase load.

The DIRIS B-30 is connected to current sensors<sup>(1)</sup> (RJ12 connection) that are suitable for all types of installation: solid TE, split-core TR, and flexible TF current sensors.

<sup>(1)</sup> See page 402.

### Advantages

#### Plug & Play

A rapid RJ12 connection makes wiring easy and reliable and prevents wiring errors. Automatically addressing and configuring the product (communication address, load type, type and ratio of current sensor) allow you to simplify implementation and to save time.

#### Class 0.5 in accordance with IEC 61557-12

- Class 0.2 for the meter alone.
- Class 0.5 from 2% to 120% of nominal current for the global measurement chain (associated with TE/TF current sensors).




#### Multi-circuit

- 4 current measurement inputs allow you to configure multiple circuits in order to optimise the number of measurement devices per installation.

#### Communication

- The DIRIS B-30 can be connected to:
  - a remote DIRIS D-30 screen for displaying measurement and metering data.
  - a DIRIS G<sup>(1)</sup> gateway for centralisation and communication of data wirelessly or via RS485 and Ethernet.
  - optional modules to communicate in BACnet IP, BACnet MSTP and PROFIBUS DP protocol. Digital or analogue input/output modules can also be connected.


<sup>(1)</sup> See page 29.

Application	Local metering	Local analysis	Remote analysis
			
<b>DIRIS B</b>	<b>B-10</b> RS485	<b>B-30</b> RS485	<b>B-30</b> RF
Number of current inputs	4	4	4
<b>Metering</b>			
± kWh, ± kvarh, kVAh	•	•	•
Load curves		•	•
Multi-tariff	•	•	•
<b>Multi-measurement</b>			
U12, U23, U31, V1, V2, V3, f	•	•	•
U system, V system	•	•	•
I1, I2, I3, In, ΣP, ΣQ, ΣS, ΣPF	•	•	•
P, Q, S, PF per phase	•	•	•
Predictive power	•	•	•
Ph/N unbalance	•	•	•
Ph/Ph unbalance	•	•	•
Current unbalance (Inba, Idir, linv, Ihom, Inb)	•	•	•
Phi, cos Phi, tan Phi	•	•	•
<b>Quality analysis</b>			
THDv1, THDv2, THDv3, THDu12, THDu23, THDu31	•	•	•
THDi1, THDi2, THDi3, THDin	•	•	•
Individual harmonics U & V (up to rank 63)		•	•
Individual harmonics I (up to rank 63)		•	•
Crest factor I1, I2, I3, In		•	•
Crest factor V1, V2, V3, U12, U23, U31		•	•
Sags, interruptions, swells (EN 50160)		•	•
Overcurrents		•	•
<b>Alarms</b>			
On threshold		•	•
Inputs/outputs	•	•	•
<b>History of average values</b>			
45 days (max)		•	•
<b>Communication</b>			
RS485 Modbus	•	•	
868 Mhz radio-frequency			•
2 inputs (status/pulse)	•	•	•

## Accessories

### DIRIS B sealing cover

- Prevents access to the cabling of the monitoring device.



### Remote radio antenna

- Mounted outside the enclosure of the DIRIS B-30 monitoring device to increase the transmission distance.

### USB configuration cable (2 m)

- Advanced configuration of DIRIS B gateways can be achieved using the EASY CONFIG software via Ethernet or direct USB connection.

# DIRIS B

Multifunction power monitoring devices


## DIRIS D-30 display

DIRIS D-30

Connection



diris-d\_001\_a\_1\_cat

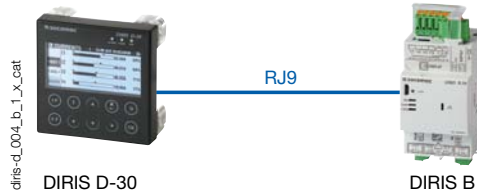

diris-d\_004\_b\_1\_LX\_cat

DIRIS D-30

DIRIS B

## Optional modules

DIRIS O



diris-b\_001\_a

Optional module

DIRIS B



Optional modules (4 max.)\*

- Digital inputs/outputs
- Analogue inputs/outputs
- Temperature inputs
- Communication protocols

\* maximum 4 optional modules with maximum 1 temperature module and 1 communication module (Modbus, PROFIBUS, BACnet IP or BACnet MSTP).



diris-o\_019\_a

**DIRIS O-iod**

- 2 digital inputs centralises the metering pulses or the input status changes of the auxiliary contacts.
- 2 digital outputs can be connected to configurable alarms warning of exceeded thresholds (power, current, etc.) or can be piloted remotely.



diris-o\_024\_a

**DIRIS O-m**

- Provides a second RS485 Modbus communication port to the DIRIS B for simultaneous sending of information via RS485 to two supervision stations.



diris-o\_018\_a

**DIRIS O-ioa**

- 2 inputs (4-20 mA) centralise analogue sensors (pressure, humidity, temperature, etc.)
- 2 outputs (4-20 mA) report the measurements (power, currents, etc.) to PLCs.



diris-o\_023\_a

**DIRIS O-p**

- Adds a PROFIBUS DPV1 communication port to the DIRIS B.



diris-o\_020\_a

**DIRIS O-it**

- 3 temperature inputs to be connected to PT100 or PT1000 sensors.
- Ambient air temperature:



diris-o\_022\_a

**DIRIS O-b/ip**

- Adds a BACnet IP communication port to the DIRIS B.




diris-o\_021\_a

**DIRIS O-b/mstp**


- Adds a BACnet MSTP communication port to the DIRIS B.

DIRIS B terminals

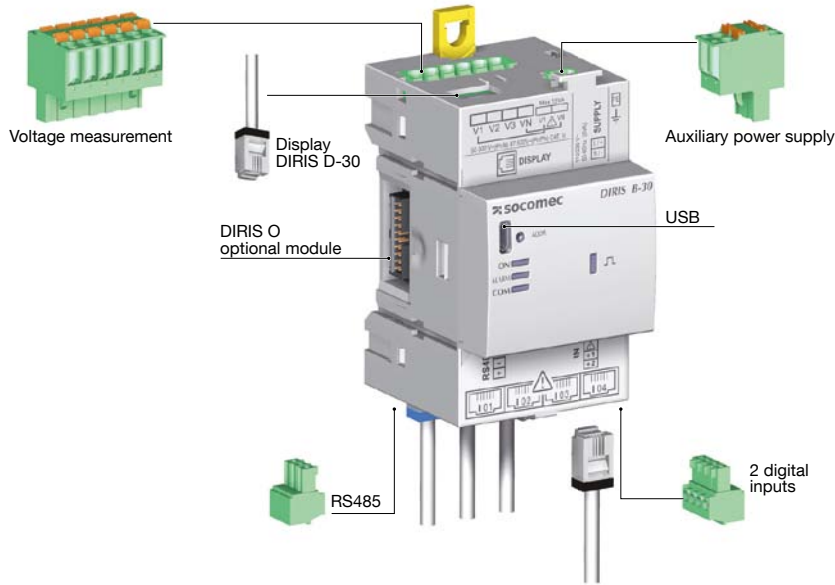


diris-d\_027\_b\_1\_gb\_cat

Current measurement




Voltage measurement and auxiliary power supply




Self supply


Easy connection of the power supply from the measurement terminal (specific terminals)

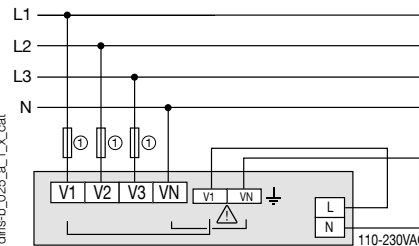


Separate power supply

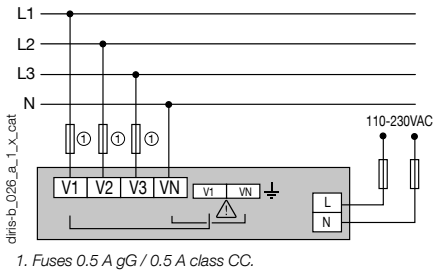


2 inputs supplied by the product




2 inputs with external power supply



RS485




RJ9 for DIRIS D-30 (self-supply and data)




Terminals of optional DIRIS O modules


Optional module power supply




DIRIS O-iod




DIRIS O-ioa




DIRIS O-it




DIRIS O-m RS485




DIRIS O-p



DIRIS O-b/ip



DIRIS O-b/mstp



### Connections

#### Associated current sensors

Various types of current sensors can be connected to the DIRIS B: Solid TE, split-core TR, flexible TF current sensors. This range of sensors can be adapted to all types of new or existing installations. A rapid RJ12 connection makes wiring easy and reliable and prevents wiring errors. The DIRIS B automatically recognises the sensor size and type. This guarantees the overall accuracy of the DIRIS B + current sensor measurement chain.

For more information: see page 402.

TE solid current sensors




TR Split-core current sensors



TF Flexible current sensors




TE / TR / TF current sensors

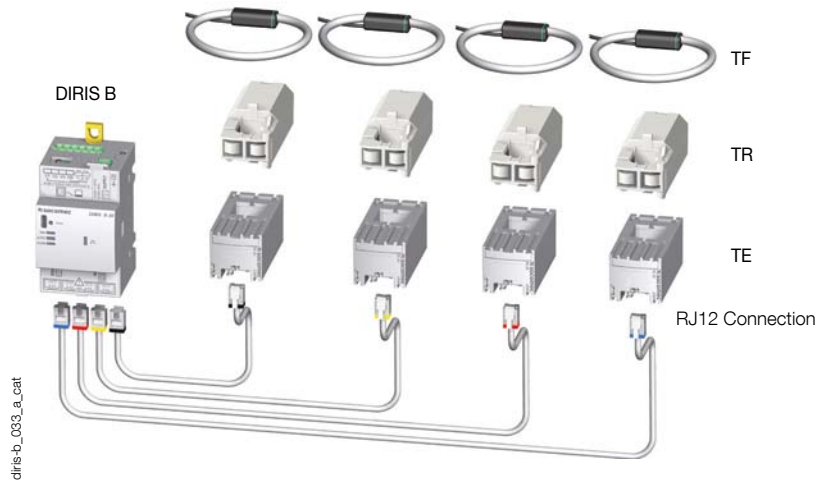

#### Network and connection examples


##### Three phase + neutral

3P+N - 4CTs (measurement for 1 three-phase load + Neutral)

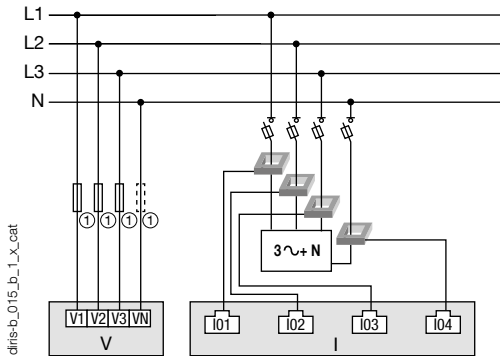


##### Three-phase

3P - 2CTs (2 three-phase loads without neutral)

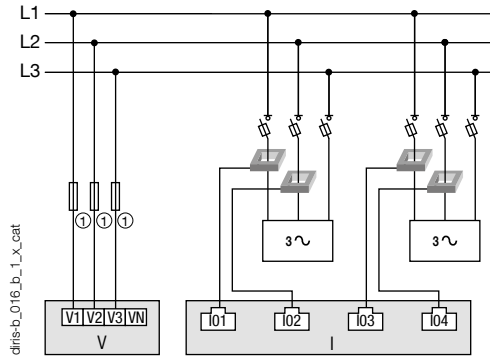


##### Three-phase

3P+N - 3CTs & 1P+N - 1CT (1 three-phase load & 1 single-phase load)

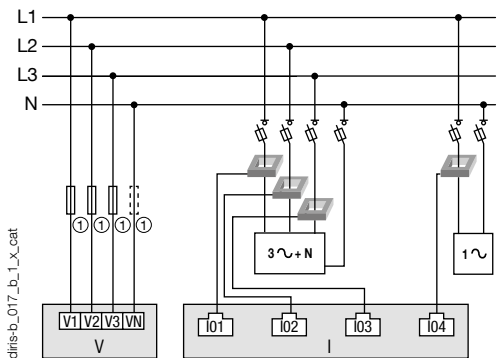

##### Single-phase

1P+N-1CT (4 single-phase loads)

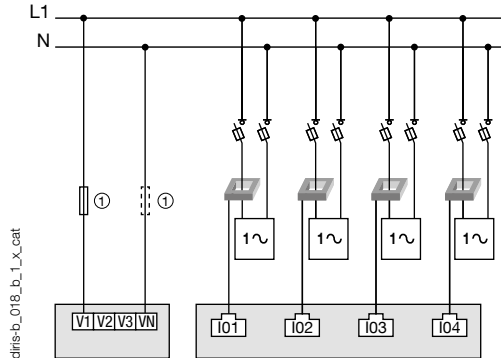


1. Fuses 0.5 A gG / 0.5 A class CC.  
In case of self-supply, a fuse must be added on the neutral.




Dimensions (mm)

DIRIS B

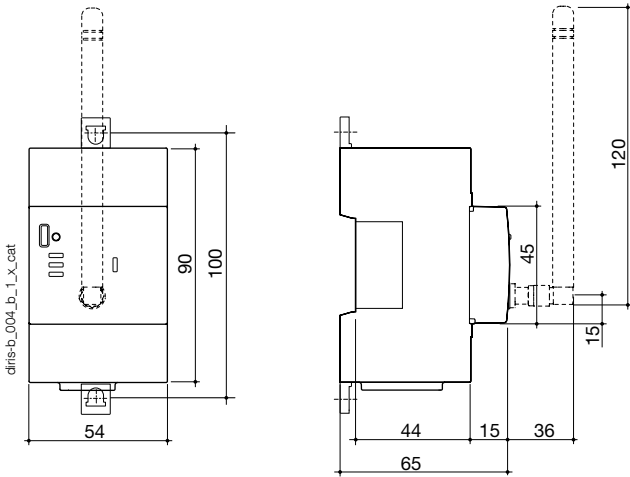


DIRIS O optional modules

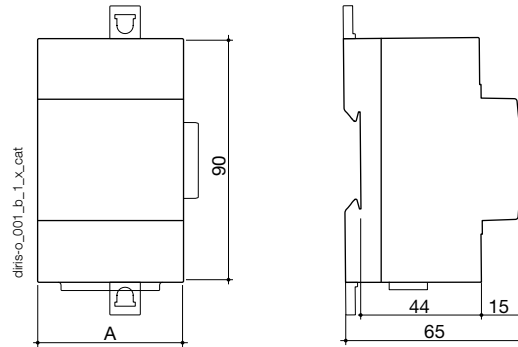

DIRIS O optional modules	A
DIRIS O-iod - DIRIS O-ioa - DIRIS O-it	45 mm
DIRIS O-m - DIRIS O-p - DIRIS O-b/ip - DIRIS O-b/mstp	54 mm


DIRIS D-30

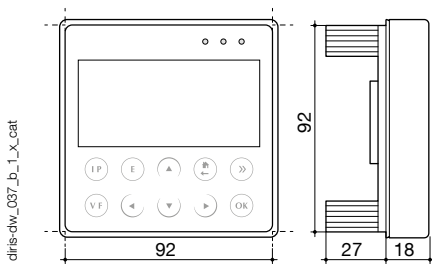

Communication architecture

Example of communication architecture with DIRIS G gateway and WEBVIEW embedded WEB server

For more information about DIRIS G, see page 516.

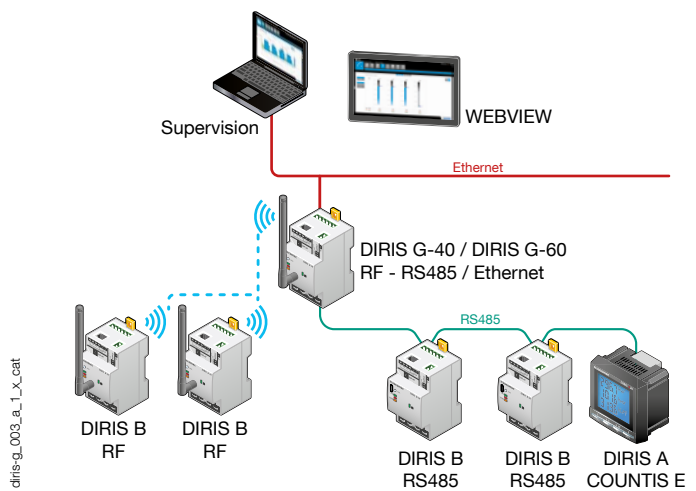

### DIRIS B characteristics

#### Electrical characteristics

Auxiliary power supply	
AC voltage	110-230VAC ±15 % (Ph/N ou Ph/Ph) Cat III
Frequency	50/60 Hz
Consumption	< 2VA without display < 6VA with display
Connection	Removable spring-cage terminal, 2 x 2 positions, 0.5 ... 2.5 mm <sup>2</sup> solid cable or 0.25 ... 1.5 mm <sup>2</sup> stranded cable with ferrule

#### Measurement characteristics

Energy and power measurement	
Accuracy	Class 0.2 DIRIS B alone
Active energy and active power	Class 0.5 with TE or TF current sensors Class 1 with TR current sensors
Reactive energy accuracy	Class 2 with TE, TR or TF current sensors

Power factor measurement	
Accuracy	Class 0.5 with TE or TF current sensors Class 1 with TR current sensors

Voltage measurement	
Network characteristics measured	50-300VAC (Ph/N) - 87-520VAC (Ph/Ph) - CAT III
Frequency range	45 ... 65Hz
Frequency accuracy	Class 0.02
Network type	Single-phase / Two-phase / Two-phase with neutral / Three-phase / Three-phase with neutral
Measurement by voltage transformer	Primary: 400 000 VAC Secondary: 60, 100, 110, 173, 190 VAC
Input consumption	≤ 0.1 VA
Permanent overload	300VAC Ph/N
Voltage measurement accuracy	Class 0.2
Connection	Removable spring-cage terminal, 2 x 6 positions, 0.5 ... 2.5 mm <sup>2</sup> solid cable or 0.25 ... 1.5 mm <sup>2</sup> stranded cable with ferrule

Current measurement	
Number of current inputs	4
Associated current sensors	Solid TE , split-core TR , flexible TF current sensors
Accuracy	Class 0.2 DIRIS B alone Class 0.5 with TE or TF current sensors Class 1 with TR current sensors
Connection	RJ12 connectors with specific SOCOMEC cable

#### Input characteristics

Number	2
Type / Power supply	Optocoupler internal polarisation (12 VDC ± 10 %) or external polarisation (10-30 VDC ± 10%)
Input function	Logic status, pulse meter or synchronisation pulse status (input 1)

#### Communication characteristics

DIRIS B RS485	
Link	RS485
Connection type	2 ... 3 half duplex wires
Protocol	Modbus RTU
Speed	1200 ... 115200 bauds
USB	DIRIS B RS485 configuration

DIRIS B-30 RF	
Link	Wireless radio frequency
Frequency band	868 MHz (low frequency: 868.1 MHz and high frequency: 869.5875 MHz)
Speed	38400 bauds
USB	DIRIS B-30 RF configuration

#### Environment characteristics

Operating temperature	-10 ... +70 °C
Storage temperature	-25 ... +85 °C
Operating humidity	55 °C / 97% relative humidity
Operating altitude	2000 m
Vibration	1G from 10 Hz to 100Hz

### DIRIS D-30 display characteristics

Mechanical characteristics	
Screen type	Capacitive touch-screen technology, 10 keys
Screen resolution	350 x 160 pixels
Single product connection	
RJ9	Self-supply and data
Micro-USB	Updating
Degree of protection	IP65 (front face)
Environment	
Storage temperature (°C)	-20 ... +70°C
Operating temperature (°C)	-20 ... +70°C
Humidity	95 % to 40°C
Installation category	CAT III
Degree of pollution	2

### DIRIS O optional modules characteristics

Power supply <sup>(1)</sup>	
AC voltage	110-230 VAC ±15 %
Frequency	50/60 Hz

(1) No power supply on DIRIS O-it.

DIRIS O-iod - 2 digital inputs/2 digital outputs	
Number of inputs	2 per optional modules - max. 4 optional modules
Type	Optocoupler internal polarisation (12 VDC ± 10 %) or external polarisation (10-30 VDC ± 10%)
Function	Logic status or pulse meter
Number of outputs	2 per optional modules - max. 4 optional modules
Type	Relay / 230VAC ±15 % - 1 A
Function	Configurable alarm (current, power,...) on threshold overruns or remote controlled status
Inputs/Outputs connection	Removable screw terminal, 4 positions, 0.14 to 1.5 mm <sup>2</sup> stranded or solid cable

DIRIS O-ioa - 2 analogue inputs/2 analogue outputs	
Number of inputs	2 per optional modules - max. 4 optional modules
Type	4-20 mA
Function	Connection of analogue sensors (pressure, humidity, temperature...)
Number of outputs	2 per optional modules - max. 4 optional modules
Type	4-20 mA
Function	Transmission of measurement image (current, power...) to PLCs

DIRIS O-it - 3 temperature inputs	
Number of inputs	3 external inputs + 1 measurement for ambient temperature
Dynamic	-20 °C to 150 °C
Type	PT100 or PT1000
Function inputs 1, 2 and 3	Temperature measurement

DIRIS O-m - RS485 communication	
Link	RS485 2 ... 3 half duplex wires
Protocol	Modbus RTU
Speed	1200 ... 115200 bauds
Connection	Removable screw terminal, 3 positions, 0.14 to 1.5 mm <sup>2</sup> stranded or solid cable

DIRIS O-p - PROFIBUS communication	
Protocol	PROFIBUS DPV1

DIRIS O-b/ip - BACnet IP communication	
Protocol	BACnet IP
Speed	10 ... 100 Mbit/s

DIRIS O-b/mstp - BACnet MSTP communication	
Protocol	BACnet MSTP
Speed	9600 ... 76800 bauds

## References

<b>DIRIS B monitoring devices</b>		<b>Reference</b>
DIRIS B-10	RS485 - Modbus - 230 VAC	4829 <b>0010</b>
DIRIS B-30	RS485 - Modbus - 230 VAC	4829 <b>0000</b>
DIRIS B-30	RF - Modbus - 230 VAC	4829 <b>0002</b>

<b>DIRIS O optional modules</b>		<b>Reference</b>
DIRIS O-iod	2 digital inputs / 2 digital outputs	4829 <b>0030</b>
DIRIS O-ioa	2 analogue inputs/2 analogue outputs 4-20 mA	4829 <b>0031</b>
DIRIS O-it	3 temperature inputs PT 100 / PT 1000	4829 <b>0032</b>
DIRIS O-m	RS485 Modbus communication	4829 <b>0033</b>
DIRIS O-p	PROFIBUS communication	4829 <b>0034</b>
DIRIS O-b/ip	BACnet IP communication	4829 <b>0035</b>
DIRIS O-b/mstp	BACnet MSTP communication	4829 <b>0036</b>

<b>Accessories</b>		<b>Reference</b>
DIRIS D-30 - Single-point display		4829 <b>0200</b>
RJ9 cable for DIRIS D-30 display - 1.5 m		4829 <b>0280</b>
RJ9 cable for DIRIS D-30 display - 3 m		4829 <b>0281</b>
Wireless remote antenna, 868 MHz - 210 mm height		4854 <b>0126</b>
Cable for remote antenna - SMA connector - 3 meter length		4854 <b>0127</b>
DIRIS B-30 sealing cover for I/O terminals		4829 <b>0049</b>
USB configuration cable		4829 <b>0050</b>