

# VS1375MS-L

## Output Power

Standby Power (ESP)	kVA	1375
	kW	1100
Prime Power (PRP)	kVA	1250
	kW	1000

## Size

	W x L x H (mm)	Weight (kg)	Fuel Tank (lt)	Noise dB(A) @ 7m
Canopied	2470x6080x2930	13093	1540	92
Open Skid	2050x4500x2390	9403	1540	N/A

TBA: To Be Asked / N/A: Not Applicable

## Continuous Power

The maximum power which a generating set is capable of delivering continuously whilst supplying a constant electrical load. Average load can be 100%. The generator must not be overloaded.

## Standby Power

The max power available during a variable electrical power sequence, under the stated operating conditions, for which a generating set is capable of delivering in the event of a utility power outage or under test conditions for up to 200 hrs of operation per year under average of 70% load. Overloading isn't permissible.

## Prime Power

The maximum power which a generating set is capable of delivering continuously whilst supplying a variable electrical load. Average load should be 70%. The generator can be overloaded 10% for 1 hour per 12 hrs.

## Engine

Manufacturer		MITSUBISHI
Model		S12R-PTA
Cylinder Configuration		V TYPE
No of Cylinders		12
Displacement	lt	49,03
Bore	mm	170
Stroke	mm	180
Compression Ratio		14:01
Aspiration		TURBOCHARGE-AFTERCOOLER
Governor Type		ELECTRONIC
Cooling System		WATER
Coolant Capacity	lt	300
Lubrication Oil Capacity	lt	180
Electrical System	VDC	24
Speed / Frequency 50 Hz	rpm	1500 rpm / 50 Hz
Engine Gross Power (Standby 50 Hz)	kW	1220
Fuel Consumption %110 ESP 50 Hz	lt / h	300
Fuel Consumption %100 PRP 50 Hz	lt / h	271
Fuel Consumption %75 PRP 50 Hz	lt / h	208
Fuel Consumption %50 PRP 50 Hz	lt / h	151
Exhaust Outlet Temperature 50 Hz	°C	492
Exhaust Gas Flow 50 Hz	m <sup>3</sup> / min	258
Combustion Air Flow 50 Hz	m <sup>3</sup> / min	98
Cooling Air Flow 50 Hz	m <sup>3</sup> / min	1800


## Alternator

Manufacturer		LEROY-SOMER
Model		LSA 50.2M6
No of Phases		3
Power Factor		0,8
No of Bearings		SINGLE
No of Poles		4
No of Leads		6
Voltage Regulation (Steady State)		± %0,5
Insulation Class		H
Degree of Protection		IP 23
Excitation System		AVR (Automatic Voltage Regulator), Brushless
Connection Type		STAR
Total Harmonic Content (No Load)		< %3,5
Frequency	Hz	50 / 60
Voltage Output 50 Hz	VAC	230 / 400
Rated Power (Standby) 400_50 Hz	kVA	1375
Efficiency (4/4_400 V_50 Hz)	%	94,9

# 509-T

## Control Panel Features 509-T

- The 509-T is a next generation genset control unit combining multi-functionality and wide communication possibilities together with a reliable and low cost design.
- The unit complies and mostly exceeds world's tightest safety EMC, vibration and environmental standards for the industrial category.
- Software features are complete with easy firmware upgrade process through USB port. The Windows based PC software allows monitoring and programming through USB, RS-485, Ethernet and GPRS.
- The PC and server based Rainbow Scada software allows monitoring and control of an unlimited number of gensets from a single central location.

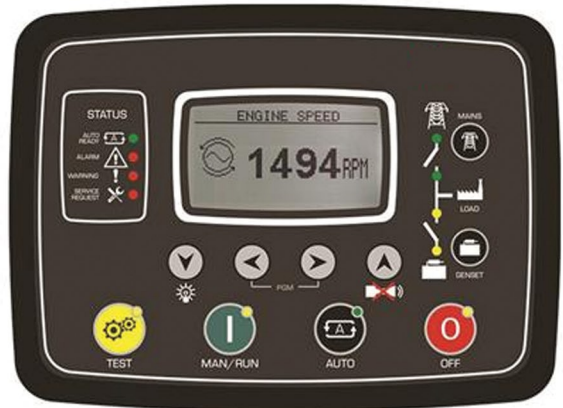

## Functions

- AMF unit with uninterrupted transfer
- ATS unit with uninterrupted transfer
- Remote start controller
- Manual start controller
- Engine controller
- Remote display & control unit
- Wave form display of V & I
- Harmonic analysis of V & I
- CTs at genset or load side

## Topologies

- 2 phase 3 wires, L1-L2
- 2 phase 3 wires, L1-L3
- 3 phase 3 wires, 3 CTs
- 3 phase 3 wires, 2 CTs (L1-L2)
- 3 phase 3 wires, 2 CTs (L1-L3)
- 3 phase 4 wires, star
- 3 phase 4 wires, delta
- 1 phase 2 wires

## Communications

- SM-GPRS
- Web monitoring
- Web programming
- GSM-SMS
- e-mail
- USB Device
- RS-232
- J1939-CANBUS

- Technical information and values are according to ISO8528, ISO3046, NEMAMG-1.22, IEC600341, BS4999-5000, VDE0530 standards.
- Producing with ISO9001, ISO14001, OHSAS18001, CE standards.
- All information given in this leaflet is intended for general purposes only.

